

REV.	DESCRIPTION	ENGR	DATE
1	First Release	JWL	5/24/2018



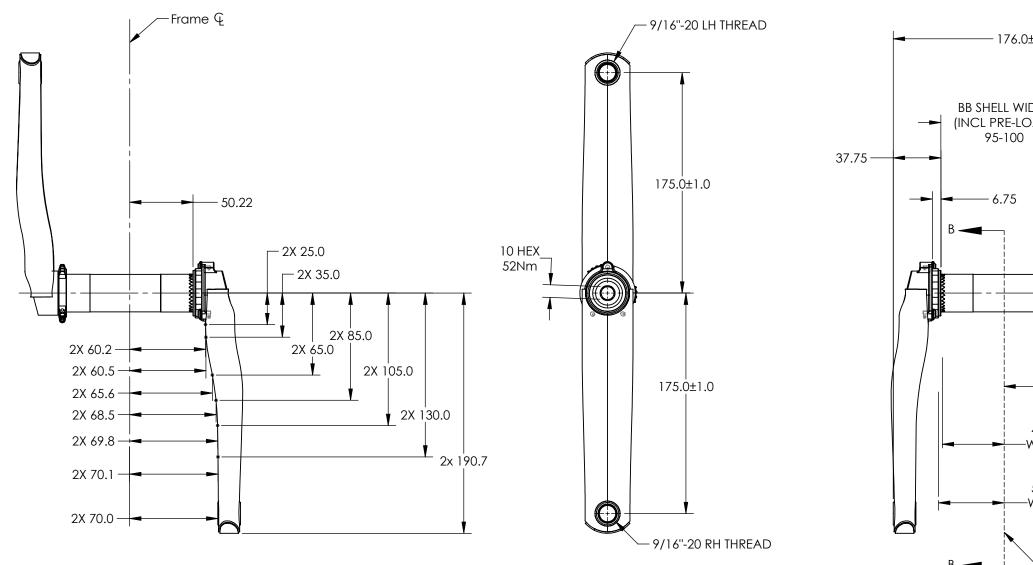

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. CANE CREEK RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. DRAWING NOT TO SCALE
- 2. MINIMUM RECOMMENDED FRAME CLEARANCE: 2.5MM. CUSTOMER IS RESPONSIBLE FOR ENSURING CLEARANCE
- 3. 30MM BOTTOM BRACKETS ONLY
- 4. BSA73 SHELL REQUIRES 2.5mm SPACER BEHIND DRIVE SIDE BEARING CUP
- 5. PF30 & BB30 SHELLS REQUIRE USE OF EXTERNAL CUP BOTTOM BRACKET
- 6. COMPATIBLE WITH X-SYNC CHAINRINGS ONLY

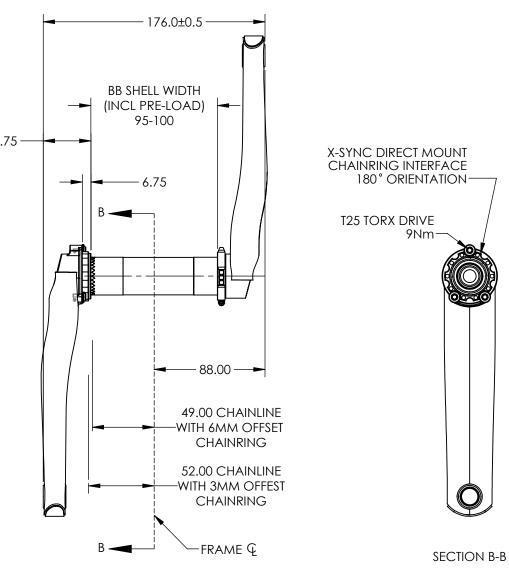